

TECHNICAL DATA SHEET

Novatik® NATURE | CLASSIC

With its curved lines and symmetric profile, Novatik NATURE CLASSIC is versatile and timeless. It is the perfect choice for those seeking an elegant roof style that will always be in fashion.

Novatik NATURE CLASSIC panels are produced using premium quality steel, protected with ZnMg 0,82 oz/sq ft (250 g/sqm) alloy plus additional multiface® anti-corrosion protection on both sides, and covered with natural volcanic stone chips. The multiface® protective layer represents a high-performance treatment applied to steel, with a thickness of 1 to 2 microns, and is an almost invisible (thin organic coating) sealant applied to hot-dip galvanized steel strips (ZnMg). Its remarkable properties give the steel a durable premium sealing, with excellent corrosion resistance and superior adhesion of subsequent finishing layers.

TRANSPARENT ACRYLIC COATING

TEXTURED FINISH
(VOLCANIC ROCK CHIPS)

BASE LAYER / COAT


MULTIFACE® PRIMER

PROTECTIVE LAYER ZN-MG

STEEL

PROTECTIVE LAYER ZN-MG

MULTIFACE® PRIMER

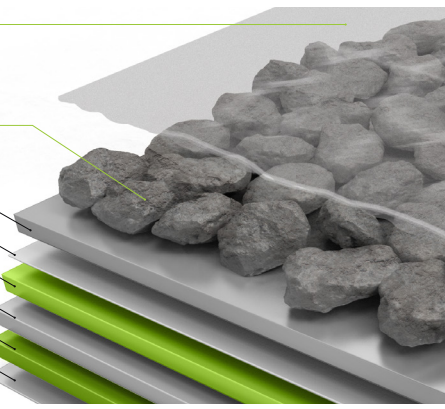

30


YEARS

AESTHETICS
WARRANTY






60

YEARS

TECHNICAL
WARRANTY

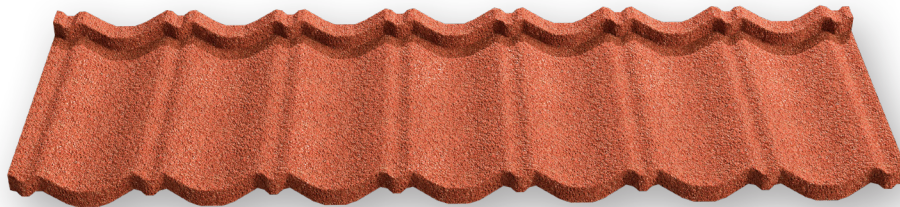

COLOURS:



TECHNICAL INFORMATION

TOTAL LENGTH	52-3/4" (1340 mm)
LENGTH OF COVER	49-5/8" (1260 mm)
WIDTH OF COVER	14-9/16" (370 mm)
PANELS / SQ	20,6 (2.15 panels/sqm)
MINIMUM ROOF PITCH	3/12 (14°)
WEIGHT / SQ	143.3 lbs (6,5 kg/sqm)
BATTEN SPACING	14-9/16" (370 mm)
STEEL TYPE / STEEL THICKNESS	DX51 / Gauge 26; (0,45 mm)
CORROSION RESISTANCE	Protective Layer ZnMg 0,82 oz/sq ft (250 g/sqm) + multiface® anti-corrosion protection
TEXTURED FINISHED	Acrylic resin + Volcanic rock (Basalt) + Protective layer
TOTAL MAXIMUM THICKNESS	1/16" (2.1 mm)

Manufactured by: NOVATIK SRL

DISTRIBUTED by: NOVATIK Distribution, LLC Tel: +1 786 512-9248, +1 239 470-7130 office@novatik.us, novatik.us
Novatik NATURE CLASSIC Technical Data Sheet | January 2023